



PUBISEAL (A+B)

TWO COMPONENT ELASTOMERIC POLYURETHANE BITUMEN EXTENDED SEALANT FOR PROFESSIONAL USE

GENERAL DESCRIPTION

ESHAPUBISEAL is a cold applied high grade, self levelling, elastomeric, two component (A+B) POLYURETHANE-BITUMEN Sealant. When cured, it provides a permanently and highly elastic jointing compound capable to withstanding a joint movement larger than 25%. It's advanced chemical formula is based on polyurethane elastomers & polymer modified bitumen.

ESHAPUBISEAL is a two component (A+B) self levelling sealant. The two components are mixed at a ratio 1:1 (v/v). Polymerization leads to a polyurethane rubber material. **ESHAPUBISEAL**, when cured, remains elastic within a temperature range of -40°C to 80°C.

ESHAPUBISEAL shows very good resistance to ageing. It has no effect on polyurethane foam, and polyethylene. It has high crack bridging properties and It is resistant to detergents, mineral oils, weak acids, and alkali solutions, recommended for aircraft parking, joints, car parking joints, gas station etc. It attacks polystyrene.

TYPICAL APPLICATIONS

ESHAPUBISEAL (A+B) is used for:

- As Joint sealant for between asphalt pavement and concrete structures.
- Sealant for all common horizontal joints of construction elements and bridge decks.
- Sealing road cracks.

SPECIFICATIONS

ESHAPUBISEAL fulfills the requirements of ASTM D 1850 61T, DIN 18540, FEDERAL SPECIFICATION SS-S-200D & EN14188-2 (TYPE M-SL-D).

CONSUMPTION

For a joint of 2.0 cm wide, and 1.4 cm deep, an indicative consumption of **ESHAPUBISEAL A+B** per linear meter is: $100\text{cm} \times 2.0\text{cm} \times 1.4\text{cm} \times 1.0 \text{ g/cm}^3 = 280\text{g}$.






PUBISEAL (A+B)

**TWO COMPONENT ELASTOMERIC
POLYURETHANE BITUMEN EXTENDED
SEALANT FOR PROFESSIONAL USE**

APPLICATION METHOD

a) Joint preparation

Joints should be dry, dust free, clean from oils and foreign matter. Previously used materials should be well removed. Shelf adhesive paper-tape must be applied along the 2 edges of the joint in order to avoid spillage outside the joint line. Sealing depth should not be less than a fraction of 0,7 the joint's width and be at least 7 mm.

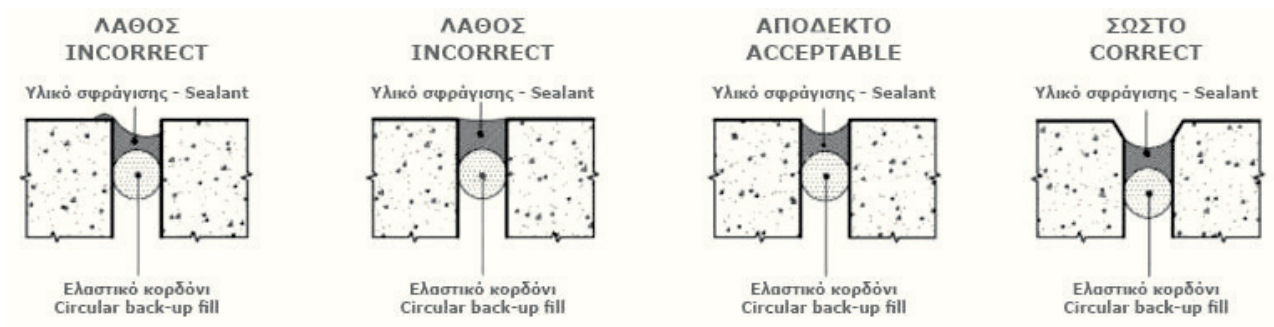

b) Joint sealing

For better adhesion, joint surface must be primed before sealing. The primer **ESHAPRIMER 21** is applied at least 1 hour, but not more than 4 hours before sealing.

Equal volumes of **ESHAPUBISEAL's** two components, are mixed and stirred to only one direction, either manually, or with a low speed mixer (~300 rpm) to avoid formation of air bubbles. Stirring is continued for 3 min after homogeneity is achieved.

The time interval between mixing and pouring into the joint must not exceed 30-45 min at 20°C. Solidification becomes apparent usually within 1 -2 hours. At least a 24 hour period is required for **ESHAPUBISEAL** to develop its final form. Polymerization time depends on temperature and humidity conditions of the environment.

STORAGE

At least for one year in sealed containers. Store in dry environment. Do not expose to heat sources.

PACKING

- i) In two containers 40lt (20lt A+20lt B)
- ii) In two drums 400lt (200lt A+200lt B)



PUBISEAL (A+B)

**TWO COMPONENT ELASTOMERIC
POLYURETHANE BITUMEN EXTENDED
SEALANT FOR PROFESSIONAL USE**

TECHNICAL CHARACTERISTICS

PROPERTIES	UNIT	DECLARED VALUE	STANDARD
Color		Black	OBSERVATION
Density	g/cm ³	1,0± 0.1	EN 13880-1
Tack free time (25°C/ 50% RH)	h	≤ 5	EN 14187-2
Curing Rate (at 2 h)	%	> 80	EN 14187-1
Self Leveling Property (horizontal level, 5°C)	mm	≤ 1	EN 14187-3
Chemical Resistance againsta slightly acidic and alkaline solutions	%	≤ -25 (change in mass) ≤ ± 30 (change in volume)	EN 14187-4 (Test liquid 5%HCl & 5% NaOH)
Elastic Recovery	%	≥ 80	EN ISO 7389
Resistance to Hydrolysis (change in Hardness Shore A)	%	≤ ± 50	EN 14187-5
Modulus of elasticity at 100% extension for 24h at 23°C	MPa	≥ 0.15	EN 10002-1
Resistance to Flame	-	No flow, No flacking	EN 14187-7

PRECAUTIONS

Harmful in contact with skin or if inhaled. May be fatal if swallowed and enters airways. Causes serious eye irritation. Flammable liquid and vapour. May cause allergy or asthma symptoms or breathing difficulties if inhaled. Causes skin irritation. May cause damage to organs through prolonged or repeated exposure (Oral)
If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protectio. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. In case of fire: Use ABC powder extinguisher to extinguish. Dispose of contents/container according to the separated collection system used in your municipality.

Note

All date given here in is for information only and cannot be considered as standard specifications and conditions of sale. Prior tests should be made by user the under his own processing conditions

The information contained in this leaflet is, to the best of our knowledge, true and reliable and is supported by the present state of our knowledge. According to the care taken and the method of application, upon which we have no influence, the values are subject to divergence. Therefore for best results, prior to use, an application test should be made by the user under his own processing conditions.

Alfa-Alfa Energy S.A.

ATHENS/CENTRAL OFFICES-FACTORY: Aspropyrgos Beach, 193 00 Aspropyrgos, Attica
T +30 2105518700, F +30 2105572974 | THESSALONIKI/OFFICES-WAREHOUSE: 18
Epirou Street, 570 09 Kalochori, T +30 2310783725, F +30 2310783326 |
www.esha.gr • sales@esha.gr



EN ISO 9001:2015 EN ISO 14001:2015